



Welcome to the new generation.

Uniroyal. A name with a reputation within the haulage industry for performance and safety, whatever the weather.

The Uniroyal 40 series was developed to meet the needs of the transport companies and provide consistent performance and safety for regional applications and long-distance routes.



FH 40

M+S

Front axle tyre

- **Improved wet performance**
due to special sipe technology in the tread design
- **High mileage gain**
thanks to the enhanced tread compound
- **Even wear picture**
due to new tread pattern



DH 40



M+S

Drive axle tyre

- **Enhanced traction on wet roads and snow**
thanks to the optimised tread design
- **Greater mileage performance**
gained by even wear characteristics
- **Improved endurance**
due to optimised belt cord



TH 40

M+S

Trailer axle tyre

- **Highly increased mileage performance**
thanks to high wear volume
- **High cut resistance**
based on the new tread compound
- **Improved wet performance**
over lifetime

*Under exclusive licence in Europe.

Uniroyal.* A brand of Continental.

COMMERCIAL
VEHICLE TYRES




Technical specifications and regrooving information:

Size	Operating code						EU tyre label ³⁾	Regrooving			Rim		Tyre dimensions						Load capacity (kg) per axle at inflation pressure ⁴⁾ (bar) (psi)					
	Pattern	LI/SI ¹⁾	Speed index and ref. speed (km/h) (F 80)	TT/TL ²⁾	PR	M+S		Depth (mm)	Width (mm)	No.	Rim-width	Min. distance between rim centres	Max. standard value in service		Design value		Stat. radius +/-1.5%	Rolling circ. +/-2%	LI ¹⁾	Tyre fitment	7.5 (109)	8.0 (116)	8.5 (123)	9.0 (131)
													Width	Outer-Ø	Width +1%	Outer-Ø +/-1%								
205/65 R 17.5	TH 40	129/127 J (130/130 F)	J 100 (F 80)	TL	16	M+S	D/C/◊ 69	2.0	6	06	6.00	231	213	721	205	711	334	2154	130	S	2370	2560	2745	
											6.75	239	220		212			129	S	2310	2495	2675		
																		130	D	4745	5125	5490		
																		127	D	4370	4720	5060		
245/70 R 17.5	FH 40	136/134 M	M 130	TL	16	M+S	E/C/◊ 69	2.0	7	01	6.75	270	250	803	240	789	364	2406	146	S	3590	3870	4150	
											7.50	279	258		248			143	S	3475	3675	3940		
																		136	S	2930	3160	3390		
	TH 40*	143/141 L (146/146 F)	L 120 (F 80)	TL	16	M+S	**	**	**	**										146	D	7180	7745	8305
																				141	D	6435	6945	7445
																				134	D	5545	5985	6415
215/75 R 17.5	FH 40*	126/124 M	M 130	TL	12	M+S	**	**	**	**	6.00	239	220	779	212	767	359	2339	135	S	2720	2940	3150	
											6.75	246	228		219			126	S	2595	2800	3005		
																		133	D	5145	5555	5955		
																				124	D	4885	5275	5655
235/75 R 17.5	TH 40*	143/141 K (144/144 F)	K 110 (F 80)	TL	16	M+S	**	**	**	**	6.75	262	242	811	233	797	372	2431	144	S	3495	3775	4045	
											7.50	271	251		241			143	S	3405	3675	3940		
																				144	D	6995	7550	8095
																				141	D	6435	6945	7445
245/70 R 19.5	TH 40	141/140 K	K 110	TL	16	M+S	C/C/◊ 70	3.0	7	07	6.75	270	250	853	240	839	389	2559	141	S	3095	3365	3635	
											7.50	279	258		248			140	D	6010	6540	7055		
																				150	S	4185	4515	4840
																				148	D	7870	8495	9105
385/55 R 22.5	FH 40*	160/-K (158/-L)	K 110 (L 120)	TL	20	M+S	**	3.0	A: 11 / B: 8	03	11.75		396	1012	381	996	464	3018	160	S	5165	5620	6065	
											12.25		401		386			158	S	5110	5555	6000		
																				160	S	5620	6065	6505
																				158	S	5555	6000	6430
385/65 R 22.5	FH 40*	160/-K (158/-L)	K 110 (L 120)	TL	20	M+S	**	3.0	A: 11 / B: 8	03	11.75		405	1092	389	1072	496	3248	160	S	5165	5620	6065	
											12.25		410		394			158	S	5110	5555	6000		
																				160	S	5620	6065	6505
																				158	S	5555	6000	6430
315/70 R 22.5	FH 40	156/150 L (154/150 M)	L 120 (M 130)	TL	20	M+S	C/B/◊ 71	2.0	10	02	9.00	351	318	1032	312	1014	468	3093	156	S	4590	4995	5390	
											9.75	360	326		320			154	S	4305	4685	5055		
																				152	S	4265	4640	5010
																				150	D	7695	8370	9035
																				148	D	7575	8240	8890
295/80 R 22.5	FH 40	154/149 M	M 130	TL	16	M+S	C/B/◊ 69	3.0	10	02	8.25	326	302	1062	290	1044	487	3184	154	S	4505	4905	5290	
											9.00	335	310		298			152	S	4265	4640	5010		
																				149	D	7815	8500	9175
																				148	D	7575	8240	8890
315/80 R 22.5	FH 40	156/150 L (154/150 M)	L 120 (M 130)	TL	20	M+S	C/B/◊ 69	3.0	10	02	9.00	351	318	1096	312	1076	500	3282	156	S	4590	4995	5390	
											9.75	360	326		320			154	S	4505	4905	5290		
																				150	D	8055	8760	9455

Data acc. to DIN 7805/4, WdK-Guidelines 134/2, 142/2, 143/14, 143/25

- 1) Load index single/dual wheel fitment and speed symbol 2) TT = Tube Type, TL = Tubeless 3) Fuel efficiency / Wet grip / External rolling noise (db) 4) For tyre pressures of 8.0 bar (116 psi) or greater, use valve slit cover plate

* in preparation ** Values in preparation

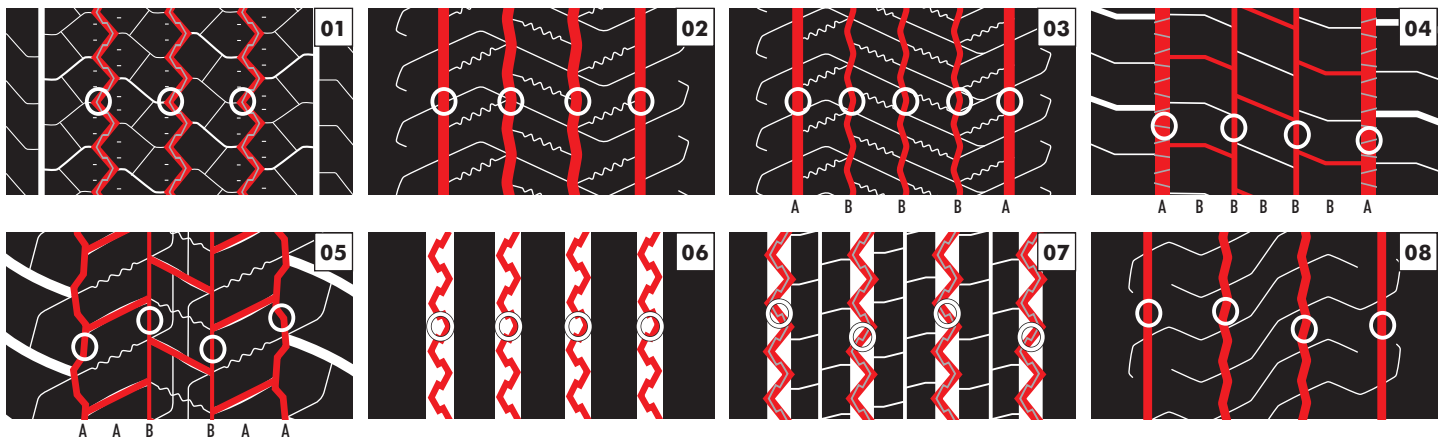

64AC7.uk 2016.11



Bandvulc Group
 Gillard Way, Lee Mill Industrial Estate,
 Ivybridge, Devon, PL21 9LN
 Tel: 01752 429198
 Email: sales@bandvulc.co.uk
 www.uniroyal.co.uk/truck

